

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="857 317 1003 470" data-label="Text"> <p>T56N R73W S 28   S 27 ----- S 33   S 34 2001</p> </div> <div data-bbox="402 506 1328 537" data-label="Text"> <p>Set a steel fence post alongside the stainless steel post.</p> </div> <hr/> <div data-bbox="402 604 1052 636" data-label="Text"> <p>From the cor. of secs. 26, 27, 34 and 35.</p> </div> <div data-bbox="402 667 971 699" data-label="Text"> <p>S. 88° 38' W., bet. secs. 27 and 34.</p> </div> <div data-bbox="402 730 846 762" data-label="Text"> <p>Over gently rolling terrain.</p> </div> <div data-bbox="277 793 1214 825" data-label="Text"> <p>20.305 Point for the E. 1/16 sec. cor. of secs. 27 and 34.</p> </div> <div data-bbox="402 856 1425 919" data-label="Text"> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="846 957 1008 1110" data-label="Text"> <p>T56N R73W S 27 E1/16 ——— S 34 2001</p> </div> <div data-bbox="402 1146 1409 1367" data-label="Text"> <p>From this point, a position established by person(s) unknown, bears N. 35° 18' E., 10 lks. dist, monumented with a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 3 ins. above the ground, at cor. of fences extending N. and E. This position is not set at the correct midpoint position between adjoining cors. and is not accepted as a careful and faithful determination of the cor. position.</p> </div> <div data-bbox="277 1398 1425 1493" data-label="Text"> <p>40.61 Point for the 1/4 sec. cor. of secs. 27 and 34, at proportionate distance, falls in oil field road extending SE. and NW; there is no remaining evidence of the original cor.</p> </div> <div data-bbox="402 1528 1425 1623" data-label="Text"> <p>Set an iron pipe, 14 ins. long, 5/8 in. diam., 17 ins. below the surface of the road, with aluminum cap inscribed BLM CADASTRAL SURVEY and mkd.</p> </div> <div data-bbox="857 1661 1003 1814" data-label="Text"> <p>T56N R73W S 27 1/4 ——— S 34 2001</p> </div>
--------	---

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	
60.80	Bay Horse Road, bears N. and S.
81.22	The cor. of secs. 27, 28, 33 and 34.
	<hr/> N. 0° 35' E., bet. secs. 27 and 28.  Over gently rolling terrain.
40.245	Point for the 1/4 sec. cor. of secs. 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T56N R73W  1/4  S 28   S 27  2001 </div>
	Set a steel fence post alongside the stainless steel post.
	Cor. is located 95 lks. E. of fence extending irregularly N. and S.
80.49	The cor. of secs. 21, 22, 27 and 28, monumented by person(s) unknown, with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set 18 ins. in the ground, with an angle iron, 34 ins. long, firmly set 18 ins. in the ground alongside. This position is filed in the Campbell County Clerk's Office and is accepted as the best available evidence of the original cor. position.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T56N R73W  S 21   S 22  <hr/> S 28   S 27  2001 </div>
	Deposit the steel reinforcement rod and angle iron inside and set a steel fence post alongside the stainless steel post.
	<hr/>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	
	From the cor. of secs. 22, 23, 26 and 27.
	S. 89° 02' W., bet. secs. 22 and 27.
	Over rolling terrain.
0.90	East Fork Bitter Creek (dry), course NW.
40.10	Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T56N R73W  S 22  1/4 ———  S 27  2001 </div>
	Set a steel fence post alongside the stainless steel post.
42.50	Bay Horse Road, bears NNE. and SSW.
80.20	The cor. of secs. 21, 22, 27 and 28.
	<hr/> N. 0° 38' E., bet. secs. 21 and 22.
	Over rolling terrain.
38.00	Draw, drains NNW.
40.665	Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T56N R73W  1/4  S 21   S 22  2001 </div>
	Set a steel fence post alongside the stainless steel post.

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS											
81.33	<p>The cor. of secs. 15, 16, 21 and 22, remonumented by Daniel A. Siek, Wyoming Registered Land Surveyor No. 2097, as filed in the Campbell County Clerk's Office, with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set 4 ins. below the surface of the ground, with decayed remains of sandstone alongside. This position is accepted as a careful and faithful perpetuation of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table> <tr><td>T56N</td><td>R73W</td></tr> <tr><td>S 16</td><td>S 15</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 21</td><td>S 22</td></tr> <tr><td colspan="2">2001</td></tr> </table> </div> <p>Deposit the steel reinforcement rod inside, and bury the decayed remains of the sandstone and set a steel fence post alongside the stainless steel post.</p> <hr/> <p>From the cor. of secs. 14, 15, 22 and 23.</p> <p>S. 89° 03' W., bet. secs. 15 and 22.</p> <p>Over rolling terrain.</p>	T56N	R73W	S 16	S 15	<hr/>		S 21	S 22	2001	
T56N	R73W										
S 16	S 15										
<hr/>											
S 21	S 22										
2001											
39.98	<p>The 1/4 sec. cor. of secs. 15 and 22, monumented with a sandstone, 12x7x5 ins., firmly set 5 ins. in the ground, plainly mkd. 1/4 on N. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <table> <tr><td>T56N</td><td>R73W</td></tr> <tr><td>S 15</td><td></td></tr> <tr><td>1/4</td><td>—</td></tr> <tr><td>S 22</td><td></td></tr> <tr><td colspan="2">2001</td></tr> </table> </div> <p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post.</p> <hr/>	T56N	R73W	S 15		1/4	—	S 22		2001	
T56N	R73W										
S 15											
1/4	—										
S 22											
2001											

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>S. 89° 01' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
20.05	<p>Point for the W. 1/16 sec. cor. of secs. 15 and 22.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R73W S 15 W1/16 ——— S 22 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p>
31.40	East Fork Bitter Creek (dry), course N.
40.10	The cor. of secs. 15, 16, 21 and 22.
	<hr/> <p>N. 0° 52' E., bet. secs. 15 and 16.</p> <p>Over rolling terrain</p>
10.10	East Fork Bitter Creek (dry), course W.
40.325	<p>Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <p style="text-align: center;">T56N R73W 1/4 S 16   S 15 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p>
80.65	<p>The cor. of secs. 9, 10, 15 and 16, monumented with a sandstone, 17x10x9 ins., loosely set 4 ins. in the ground, plainly mkd. 3 grooves on E. face and 4 notches on S. edge.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<div data-bbox="850 317 997 470" style="text-align: center;"> T56N R73W  S 9   S 10  <hr style="width: 100px; margin: 0 auto;"/> S 16   S 15  2001 </div> <p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post. Raise a mound of stone, 4 ft. base, 3 ft. high, W. of the cor.</p> <p>Cor. is located S. 86½° W., 31 lks. dist., from intersection of fences extending N. and E. with abandoned fences extending S. and W.</p> <hr style="width: 100%;"/> <p>From the cor. of secs. 10, 11, 14 and 15.</p> <p>S. 88° 43' W., bet. secs. 10 and 15.</p> <p>Over rolling terrain, along fence.</p>
40.18	<p>The 1/4 sec. cor. of secs. 10 and 15, monumented with a lava stone, 12x9x5 ins., lying flat, embedded 3 ins. in the ground, plainly mkd. 1/4 on top face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="850 1272 997 1425" style="text-align: center;"> T56N R73W  S 10  1/4 ———  S 15  2001 </div> <p>Bury the original cor. stone alongside the stainless steel post.</p> <p>Cor. is located 1.5 lks. S. of fence extending E. and W.</p> <hr style="width: 100%;"/> <p>S. 88° 53' W., beginning new measurement.</p> <p>Over rolling terrain.</p>
39.75	<p>The cor. of secs. 9, 10, 15 and 16.</p> <hr style="width: 100%;"/>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>N. 0° 01' E., bet. secs. 9 and 10.</p> <p>Over rolling and broken terrain.</p> <p>39.965 Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T56N R73W  1/4  S 9   S 10  2001 </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 70 lks. W. of fence extending irregularly N. and S.</p> <p>79.93 The cor. of secs. 3, 4, 9 and 10, identical with Cor. No. 3, Tract 49 and Cor. No. 4, Tract 50, monumented with an iron post, 2 ins. diam., firmly set, projecting 11 ins. above the ground, at intersection of fences extending E., S. and W., with brass cap mkd.</p> <div style="text-align: center;"> T56N R73W  S 4   S 3  <hr/> S 9   S 10  1922 </div> <hr/> <p style="text-align: center;">(Restoring the resurvey executed by Mark D. King in 1922)</p> <hr/> <p>From the cor. of secs. 2, 3, 10 and 11, identical with Cor. No. 4, Tract 48.</p> <p>S. 86° 45' W., bet. secs. 3 and 10.</p> <p>Over rolling terrain.</p> <p>39.28 The 1/4 sec. cor. of secs. 3 and 10, identical with Cor. No. 3, Tract 48 and Cor. No. 4, Tract 49, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above the ground, at cor. of fences extending N. and W., with brass cap mkd.</p>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<div style="text-align: center;"> <p>S 3 1/4 ——— S 10 1922</p> </div> <hr/> <div style="text-align: center;"> <p>(Restoring the survey executed by Mortimer N. Grant in 1883)</p> </div> <hr/> <p>From the cor. of secs. 32 and 33 only, on the S. bdy. of the Tp. N. 0° 43' W., bet. secs. 32 and 33.</p> <p>Over gently rolling terrain.</p> <p>40.315 Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W 1/4 S 32   S 33 2001</p> </div> <p>Cor. is located N. 79½° W., 17 lks. dist., from cor. of new fences extending S. and E.</p> <p>From this point, U.S. Coast and Geodetic Survey Triangulation Station "RECLUSE", bears N. 42° 51' E., 11.31 chs. dist., monumented with a concrete post, 10 ins. square, firmly set, projecting 6 ins. above the ground, with standard brass disk on top mkd. RECLUSE 1949.</p> <p>80.63 The cor. of secs. 28, 29, 32 and 33, monumented by William G. Ladd, Wyoming Professional Engineer and Land Surveyor No. 519, with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set 1 in. below the surface of the ground, with aluminum cap mkd. 519 T56N 28 29 32 33 R73W WGL 1984, with a steel fence post alongside. This position is filed in the Campbell County Clerk's Office and is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
--------	---



Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="852 315 998 472"> <p>T56N R73W S 29   S 28 ----- S 32   S 33 2001</p> </div> <p data-bbox="397 504 1388 567">Deposit the steel reinforcement rod inside the stainless steel post.</p> <hr/> <p data-bbox="397 630 1047 661">From the cor. of secs. 27, 28, 33 and 34.</p> <p data-bbox="397 693 966 724">S. 89° 43' W., bet. secs. 28 and 33.</p> <p data-bbox="397 756 836 787">Over gently rolling terrain.</p> <p data-bbox="267 819 1421 892">40.33 Point for the 1/4 sec. cor. of secs. 28 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p data-bbox="397 913 1421 976">Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="852 1018 998 1176"> <p>T56N R73W S 28 1/4 _____ S 33 2001</p> </div> <p data-bbox="397 1207 1323 1239">Set a steel fence post alongside the stainless steel post.</p> <p data-bbox="267 1270 966 1302">80.66 The cor. of secs. 28, 29, 32 and 33.</p> <hr/> <p data-bbox="397 1365 950 1396">N. 0° 26' E., bet. secs. 28 and 29.</p> <p data-bbox="397 1428 836 1459">Over gently rolling terrain.</p> <p data-bbox="267 1491 1421 1564">40.305 Point for the 1/4 sec. cor. of secs. 28 and 29, at proportionate distance; there is no remaining evidence of the original cor.</p> <p data-bbox="397 1585 1421 1648">Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div data-bbox="852 1690 998 1816"> <p>T56N R73W 1/4 S 29   S 28 2001</p> </div>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set a steel fence post alongside the stainless steel post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>80.61 The cor. of secs. 20, 21, 28 and 29, determined at record bearing and distance from the witness cor. established by William G. Ladd, Wyoming Professional Engineer and Land Surveyor No. 519</p> <p>A steel reinforcement rod, 5/8 in. diam., firmly set flush with the surface of the ground, bears EAST, 37.9 lks. dist., with a steel fence post alongside, with aluminum cap mkd. 519 T56N 20 21 28 29 PR WC 25' E R73W WGL 1984.</p> <p>This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <table data-bbox="850 982 997 1136"> <tr><td colspan="2">T56N R73W</td></tr> <tr><td>S 20</td><td>S 21</td></tr> <tr><td colspan="2"><hr/></td></tr> <tr><td>S 29</td><td>S 28</td></tr> <tr><td colspan="2">2001</td></tr> </table> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located on E. bank of creek (dry), course N.</p> <hr/> <p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>S. 89° 49' W., bet. secs. 21 and 28.</p> <p>Over rolling terrain.</p> <p>6.90 Wash, drains N.</p> <p>40.435 Point for the 1/4 sec. cor. of secs. 21 and 28, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>	T56N R73W		S 20	S 21	<hr/>		S 29	S 28	2001	
T56N R73W											
S 20	S 21										
<hr/>											
S 29	S 28										
2001											

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="857 317 1006 470" data-label="Text"> <p>T56N R73W S 21 1/4 ——— S 28 2001</p> </div> <div data-bbox="402 506 1330 537" data-label="Text"> <p>Set a steel fence post alongside the stainless steel post.</p> </div> <div data-bbox="280 569 977 600" data-label="Text"> <p>80.87 The cor. of secs. 20, 21, 28 and 29.</p> </div> <hr/> <div data-bbox="402 663 961 695" data-label="Text"> <p>N. 1° 16' E., bet. secs. 20 and 21.</p> </div> <div data-bbox="402 726 737 758" data-label="Text"> <p>Over rolling terrain.</p> </div> <div data-bbox="280 789 1429 856" data-label="Text"> <p>40.345 Point for the 1/4 sec. cor. of secs. 20 and 21, at proportionate distance; there is no remaining evidence of the original cor.</p> </div> <div data-bbox="402 888 1425 953" data-label="Text"> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="857 989 1006 1108" data-label="Text"> <p>T56N R73W 1/4 S 20   S 21 2001</p> </div> <div data-bbox="402 1142 1330 1173" data-label="Text"> <p>Set a steel fence post alongside the stainless steel post.</p> </div> <div data-bbox="280 1205 1429 1520" data-label="Text"> <p>80.69 The cor. of secs. 16, 17, 20 and 21, remonumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, as filed in the Campbell County Clerk's Office, with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set 2 ins. below the surface of the ground, in a mound of stone, with a steel fence post alongside, at intersection of abandoned fences extending N., E., S. and W., with aluminum cap mkd. RUMPH SURVEYS GILLETTE WYOMING T56N R73W 16 17 20 21 LS 538 1986. This position is accepted as a careful and faithful perpetuation of the original cor. position.</p> </div> <div data-bbox="402 1556 704 1587" data-label="Text"> <p>At the corner point</p> </div> <div data-bbox="402 1619 1425 1684" data-label="Text"> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="857 1719 1006 1873" data-label="Text"> <p>T56N R73W S 17   S 16 ————— S 20   S 21 2001</p> </div>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Deposit the steel reinforcement rod inside the stainless steel post and rebuild the mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <hr/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>S. 89° 21' W., bet. secs. 16 and 21.</p> <p>Over rolling terrain.</p> <p>19.99 Point for the E. 1/16 sec. cor. of secs. 16 and 21.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 16</p> <p>E1/16 ———</p> <p>S 21</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>39.98 Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 16</p> <p>1/4 ———</p> <p>S 21</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>79.96 The cor. of secs. 16, 17, 20 and 21.</p> <hr/> <p>N. 0° 03' E., bet. secs. 16 and 17.</p> <p>Over rolling terrain, along abandoned fence.</p> <p>1.50 Ridge, bears SSE. and NNW.</p>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.07	<p>The 1/4 sec. cor. of secs. 16 and 17, monumented with a sandstone, 12x11x4 ins., firmly set 7 ins. in the ground, in abandoned fence extending N. and S., plainly mkd. 1/4 on W. face.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>1/4</p> <p>S 17   S 16</p> <p>2001</p> </div> <p>Bury the original cor. stone and set a steel fence post alongside the stainless steel post.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 0° 20' E., beginning new measurement.</p> <p>Over rolling terrain, along abandoned fence.</p>
28.30	East Fork Bitter Creek (dry), course WNW.
39.10	Fence, bears ENE. and WSW.
40.33	<p>The cor. of secs. 8, 9, 16 and 17, monumented with a mound of stone, 3 ft. base, 2 ft. high., no mkd. stone found, at intersection of abandoned fences extending N., E. and S. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 8   S 9</p> <hr style="width: 20%; margin: 5px auto;"/> <p>S 17   S 16</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post and rebuild the mound of stone, 4 ft. base, 3 ft. high, W. of the cor.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>From this point, a position established by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, as filed in the Campbell County Clerk's Office, bears N. 55° 16' W., 2.53 chs. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, in a mound of stone, with aluminum cap mkd. RUMPH SURVEYS GILLETTE WYOMING T56N R73W 16 17 20 21 LS 538 1986. This position is in wide variance with surrounding original evidence and is in conflict with the mound of stone and intersection of abandoned fences described above and is not accepted as the best available evidence of the original cor. position.</p> <hr/> <p>From the cor. of secs. 9, 10, 15 and 16.</p> <p>S. 89° 11' W., bet. secs. 9 and 16.</p> <p>Over rolling terrain.</p> <p>40.45 Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 9</p> <p>1/4 ———</p> <p>S 16</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located in abandoned fence extending E. and W.</p> <p>43.00 Ridge, bears N. and S.</p> <p>80.90 The cor. of secs. 8, 9, 16 and 17.</p> <hr/> <p>N. 0° 20' E., bet. secs. 8 and 9.</p> <p>Over rolling terrain.</p> <p>40.21 Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
--------	---

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T56N R73W 1/4 S 8   S 9 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located in or near abandoned fence extending N. and S., and 1.61 chs. E. of fence extending NNE. and SSW.</p>
60.315	<p>Point for the N. 1/16 sec. cor. of secs. 8 and 9.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R73W N1/16 S 8   S 9 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located in or near abandoned fence extending N. and S., and 20 lks. E. of fence extending NNE. and SSW.</p>
80.42	<p>The cor. of secs. 4, 5, 8 and 9, monumented with an iron post, 2 ins. diam., firmly set, projecting 7 ins. above the ground, at intersection of fences extending E. and W. with abandoned fences extending N. and S., with brass cap mkd.</p> <p style="text-align: center;">T56N R73W S 5   S 4 ----- S 8   S 9 1922</p>
	<p>From the cor. of secs. 31 and 32 only, identical with Cor. No. 2, Tract 52 and Cor. No. 1, Tract 53, on the S. bdy. of the Tp.</p> <p>N. 0° 30' W., bet. secs. 31 and 32.</p> <p>Over gently rolling terrain.</p>
21.70	<p>Recluse Road, bears N. and SSW; thence along road.</p>
40.225	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate distance, falls in Recluse Road extending N. and S.; there is no remaining evidence of the original cor.</p>

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 12 ins. below the surface of the road, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W 1/4 S 31   S 32 2001</p> </div> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2½ ins. diam., set 26 ins. in the ground for a reference monument, bears S. 45° W., 1.130 chs. dist., with brass cap mkd. RM T56N R73W S31 74.6 FT. TO COR. 2001 and an arrow pointing to the cor.</p> <p>A stainless steel post, 28 ins. long, 2½ ins. diam., set 26 ins. in the ground for a reference monument, bears N. 45° W., 1.129 chs. dist., with brass cap mkd. RM T56N R73W S31 74.5 FT. TO COR. 2001 and an arrow pointing to the cor.</p> <p>80.45 Point for the cor. of secs. 29, 30, 31 and 32, at proportionate distance, falls in Recluse Road extending N. and S.; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 14 ins. below the surface of the road, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W S 30   S 29 ----- S 31   S 32 2001</p> </div> <p>from which</p> <p>A stainless steel post, 28 ins. long, 2½ ins. diam., set 26 ins. in the ground for a reference monument, bears S. 45° W., 2.029 chs. dist., with brass cap mkd. RM T56N R73W S31 133.9 FT. TO COR. 2001 and an arrow pointing to the cor.</p> <p>A stainless steel post, 28 ins. long, 2½ ins. diam., set 26 ins. in the ground for a reference monument, bears N. 45° W., 2.089 chs. dist., with brass cap mkd. RM T56N R73W S30 137.9 FT. TO COR. 2001 and an arrow pointing to the cor.</p>
--------	---



Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>From this point, a monument set by William G. Ladd, Wyoming Professional Engineer and Land Surveyor No. 519, a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 10 ins. above the ground, with aluminum cap mkd. 519 T56N 29 30 31 32 R74W PR WGL 1984, bears S. 88° 04' W., 1.28 chs. dist. This monument is not at the position as shown by Mr. Ladd on well location plats filed with the State of Wyoming Oil and Gas Conservation Commission and has presumably been disturbed and reset incorrectly by person(s) unknown during road construction activities. This position is not accepted as a careful and faithful reestablishment of the original cor. position.</p> <hr/> <p>From the cor. of secs. 28, 29, 32 and 33.</p> <p>S. 88° 55' W., bet. secs. 29 and 32.</p> <p>Over gently rolling terrain.</p> <p>40.49 Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 29</p> <p>1/4 ———</p> <p>S 32</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>77.20 Bitter Creek (dry), course N.</p> <p>80.98 The cor. of secs. 29, 30, 31 and 32.</p> <hr/> <p>S. 88° 46' W., bet. secs. 30 and 31.</p> <p>Over rolling terrain.</p> <p>40.51 Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
--------	---

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="857 317 1008 470" data-label="Text"> <p>T56N R73W S 30 1/4 ——— S 31 2001</p> </div> <div data-bbox="402 506 1333 600" data-label="Text"> <p>Set a steel fence post alongside the stainless steel post. Cor. is located 21 lks. S. of fence extending E. and W.</p> </div> <div data-bbox="280 632 1395 663" data-label="Text"> <p>79.75 The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp.</p> </div> <hr/> <div data-bbox="402 730 1057 884" data-label="Text"> <p>From the cor. of secs. 29, 30, 31 and 32. N. 0° 19' E., bet. secs. 29 and 30. Over rolling terrain, along Recluse Road.</p> </div> <div data-bbox="280 919 894 951" data-label="Text"> <p>14.60 Bitter Creek (dry), course WNW.</p> </div> <div data-bbox="280 982 992 1014" data-label="Text"> <p>16.60 Leave Recluse Road, bears NNE. and S.</p> </div> <div data-bbox="280 1045 1430 1205" data-label="Text"> <p>40.225 Point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance; there is no remaining evidence of the original cor.  Set a stainless steel post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="857 1241 1008 1362" data-label="Text"> <p>T56N R73W 1/4 S 30   S 29 2001</p> </div> <div data-bbox="402 1398 1330 1430" data-label="Text"> <p>Set a steel fence post alongside the stainless steel post.</p> </div> <div data-bbox="280 1461 1446 1650" data-label="Text"> <p>80.45 The cor. of secs. 19, 20, 29 and 30, remonumented by person(s) unknown, with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, in a collar of stone, with a sandstone, 12x9x4 ins., lying loose alongside, plainly mkd. 5 notches on an edge, no other mks. visible, in projection of fence from the E., with brass cap mkd.</p> </div> <div data-bbox="857 1686 1000 1871" data-label="Text"> <p>TWS. 56N 19   20 ——— 30   29 1968 RAN. 73W</p> </div>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>This position is filed in the Campbell County Clerk's Office and is accepted as a careful and faithful perpetuation of the original cor. position.</p> <p>Bury the original cor. stone and set a steel fence post alongside the iron post.</p> <hr/> <p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 88° 24' W., bet. secs. 20 and 29.</p> <p>Over rolling terrain.</p> <p>17.60 From this point, cor. of fences extending S. and W., bears NORTH, 28 lks. dist.</p> <p>40.79 The 1/4 sec. cor. of secs. 20 and 29, monumented by person(s) unknown, with a steel spike, 8 ins. long, firmly set flush with the surface of the ground, in an embedded mound of stone, 3 ft. base, 1 ft. high, no mkd. stone found, in fence extending E. and W. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 20</p> <p>1/4 ———</p> <p>S 29</p> <p>2001</p> </div> <p>Deposit the steel spike inside the stainless steel post and rebuild the mound of stone, 3 ft. base, 2 ft. high, N. of the cor.</p> <hr/> <p>S. 89° 12' W., beginning new measurement.</p> <p>Over rolling terrain, along fence.</p> <p>37.16 Cor. of fences extending E. and NNW.</p> <p>38.00 Recluse Road, bears SSE. and NNW.</p>
--------	--

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.33	The cor. of secs. 19, 20, 29 and 30.
	S. 89° 11' W., bet. secs. 19 and 30.
	Over rolling terrain.
41.02	Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R73W
	S 19
	1/4 ———
	S 30
	2001
	Set a steel fence post alongside the stainless steel post.
80.36	The cor. of secs. 19, 24, 25 and 30, on the W. bdy. of the Tp.
	From the cor. of secs. 19, 20, 29 and 30.
	N. 0° 15' E., bet. secs. 19 and 20
	Over rolling terrain.
6.00	Recluse Road, bears SSE. and NNW.
40.23	The 1/4 sec. cor. of secs. 19 and 20, monumented with a sandstone, 12x10x2 ins., loosely set 2 ins. in the ground, no mks. visible, in a mound of stone, 3 ft. base, flush with the ground. This position is accepted as the best available evidence of the original cor. position.
	At the corner point
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R73W
	1/4
	S 19   S 20
	2001

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Bury the unmkd. stone and set a steel fence post alongside the stainless steel post. Rebuild the mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p> <p>Cor. is located 12 lks. W. of abandoned fence extending N. and S.</p> <hr/> <p>N. 0° 32' E., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>40.63 Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <table border="1"> <tr> <td>S 18</td><td>S 17</td></tr> <tr> <td>S 19</td><td>S 20</td></tr> </table> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located 6 lks. W. of abandoned fence extending N. and S.</p> <hr/> <p>From the cor. of secs. 16, 17, 20 and 21.</p> <p>S. 88° 57' W., bet. secs. 17 and 20.</p> <p>Over rolling terrain.</p> <p>41.16 Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 17</p> <p>1/4 ———</p> <p>S 20</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>42.50 Creek (dry), course NW.</p>	S 18	S 17	S 19	S 20
S 18	S 17				
S 19	S 20				

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	
82.32	The cor. of secs. 17, 18, 19 and 20.
	<hr/>
	S. 88° 38' W., bet. secs. 18 and 19.
	Over rolling terrain.
32.00	Recluse Road, bears N. and S.
41.21	Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R73W S 18 1/4 ——— S 19 2001
	Set a steel fence post alongside the stainless steel post.
	Cor. is located 2.40 chs. S. of fence extending E. and W.
80.97	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp.
	<hr/>
	From the cor. of secs. 17, 18, 19 and 20.
	N. 1° 38' E., bet. secs. 17 and 18.
	Over rolling terrain.
4.50	Fence, bears E. and W.
40.645	Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.
	Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	T56N R73W 1/4 S 18   S 17 2001
	Set a steel fence post alongside the stainless steel post.

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Cor. is located S. 52° W., 1.72 chs. dist., from cor. of fences extending E. and S.</p>				
51.50	Creek (dry), course NW.				
81.29	<p>The cor. of secs. 7, 8, 17 and 18, monumented with a mound of stone, 4 ft. base, 2 ft. high, no mkd. stone found. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <table> <tr> <td>S 7</td><td>S 8</td></tr> <tr> <td>S 18</td><td>S 17</td></tr> </table> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post and rebuild the mound of stone, 5 ft. base, 3 ft. high, W. of the cor.</p> <hr/> <p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>S. 89° 32' W., bet. secs. 8 and 17.</p> <p>Over rolling terrain.</p>	S 7	S 8	S 18	S 17
S 7	S 8				
S 18	S 17				
20.06	<p>Point for the E. 1/16 sec. cor. of secs. 8 and 17.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T56N R73W</p> <p>S 8</p> <p>E1/16 ———</p> <p>S 17</p> <p>2001</p> </div> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located in East Fork Bitter Creek (dry), course WNW.</p>				
40.12	Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original cor.				

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R73W S 8 1/4 ——— S 17 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>Cor. is located N. 89½° E., 1.54 chs. dist., from intersection of fences extending ENE., SSW. and NW.</p> <p>60.18 Point for the W. 1/16 sec. cor. of secs. 8 and 17.</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T56N R73W S 8 W1/16 ——— S 17 2001</p> <p>Set a steel fence post alongside the stainless steel post.</p> <p>80.24 The cor. of secs. 7, 8, 17 and 18.</p> <hr/> <p>S. 89° 25' W., bet. secs. 7 and 18.</p> <p>Over rolling terrain.</p> <p>17.10 Creek (dry), course NW.</p> <p>31.70 Recluse Road, bears NNE. and SSW.</p> <p>40.22 The 1/4 sec. cor. of secs. 7 and 18, monumented with a mound of stone, 4 ft. base, 2 ft. high, no mkd. stone found. This position is accepted as the best available evidence of the original cor. position.</p> <p>At the corner point</p> <p>Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p>
--------	---



Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="867 310 1013 470"> <p>T56N R73W S 7 1/4 ——— S 18 2001</p> </div> <div data-bbox="410 506 1386 596"> <p>Set a steel fence post alongside the stainless steel post and rebuild the mound of stone, 4 ft. base, 2 ft. high, N. of the cor.</p> </div> <div data-bbox="410 663 1062 756"> <p>S. 85° 32' W., beginning new measurement. Over rolling terrain.</p> </div> <div data-bbox="285 789 1386 821"> <p>42.90 The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp.</p> </div> <div data-bbox="410 888 1029 1043"> <p>From the cor. of secs. 7, 8, 17 and 18. N. 1° 22' W., bet. secs. 7 and 8. Over rolling terrain.</p> </div> <div data-bbox="285 1077 1435 1234"> <p>39.38 Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.  Set a stainless steel post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="867 1270 1013 1392"> <p>T56N R73W 1/4 S 7   S 8 2001</p> </div> <div data-bbox="410 1430 1419 1682"> <p>Set a steel fence post alongside the stainless steel post.  From this point, a position established by person(s) unknown, bears S. 31° 39' W., 66.5 lks. dist., monumented with a steel reinforcement rod, 5/8 in. diam., firmly set, projecting 2 ins. above the ground, with unmkd. aluminum cap, at cor. of fences extending SE. and W. This position is not accepted as the best available evidence of the original cor. position.</p> </div> <div data-bbox="285 1715 1062 1747"> <p>62.10 East Fork Bitter Creek (dry), course NNW.</p> </div> <div data-bbox="285 1780 1435 1873"> <p>78.76 The cor. of secs. 5, 6, 7 and 8, monumented with an iron post, 2 ins. diam., firmly set, projecting 12 ins. above the ground, in fence extending E. and W., with brass cap mkd.</p> </div>
--------	---

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="852 310 1015 472" data-label="Text"> <p>T56N R73W S 6   S 5 <hr/>S 7   S 8 1922</p> </div> <div data-bbox="657 535 1226 598" data-label="Text"> <p>(Restoring the resurvey executed by Mark D. King in 1922)</p> </div> <div data-bbox="402 661 950 693" data-label="Text"> <p>S. 88° 23' W., bet. secs. 6 and 7.</p> </div> <div data-bbox="402 724 1063 756" data-label="Text"> <p>Over gently rolling terrain, along fence.</p> </div> <div data-bbox="292 787 1128 819" data-label="Text"> <p>2.57 Recluse Road, bears NE. and SW., leave fence.</p> </div> <div data-bbox="276 850 1453 955" data-label="Text"> <p>20.71 Cor. No. 5, Tract 53, identical with Cor. No. 4, Tract 55, monumented with an iron post, 1 in. diam., firmly set, projecting 11 ins. above the ground, with brass cap mkd.</p> </div> <div data-bbox="836 976 1031 1165" data-label="Text"> <p>T56N R73W TR 55   TR 53 4   5 <hr/>S 7 1922</p> </div> <div data-bbox="397 1197 1437 1270" data-label="Text"> <p>Cor. is located 1 ch. E. of East Fork Bitter Creek (dry), course NNW.</p> </div> <div data-bbox="397 1323 1063 1365" data-label="Text"> <p>S. 88° 30' W., beginning new measurement.</p> </div> <div data-bbox="397 1386 852 1428" data-label="Text"> <p>Over gently rolling terrain.</p> </div> <div data-bbox="276 1449 1453 1585" data-label="Text"> <p>20.72 The 1/4 sec. cor. of secs. 6 and 7, monumented with an iron post, 1 in. diam., firmly set, projecting 8 ins. above the ground, with a mound of stone, 4 ft. base, 1 ft. high, N. of the cor., with brass cap mkd.</p> </div> <div data-bbox="852 1617 1006 1753" data-label="Text"> <p>S 6 1/4 — S 7 1922</p> </div>
--------	---

Dependent Resurvey, Portion of the Subdivisional Lines,  
T. 56 N., R. 73 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>S. 88° 14' W., beginning new measurement.</p> <p>Over rolling terrain.</p> <p>39.17 The cor. of secs. 1, 6, 7 and 12, identical with Cor. No. 3, Tract 55, on the W. bdy. of the Tp.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area embraced by this survey is situated in northern Campbell County, approximately 3 miles north of Recluse, Wyoming. The terrain varies from nearly level to rolling and broken. The elevation ranges from about 3,850 feet to about 4,250 feet above sea level. The soil is primarily sandy loam. The vegetation consists of sagebrush, native and domestic grasses along with areas of scattered timber (pine and juniper) in the northern portion of the township.</p> <p>Drainage of the area is provided by Bitter Creek and East Fork Bitter Creek which flow intermittently in a northwesterly direction, aided by numerous draws and washes. The majority of the township is utilized in large ranching operations with only three inhabited homes in the area surveyed. There has been extensive oil and gas exploration resulting in many producing wells.</p> <p>Access is provided by Recluse, Bay Horse and Elk Creek county roads aided by numerous oil field and trail roads which provide good access into the township.</p>
--------	--

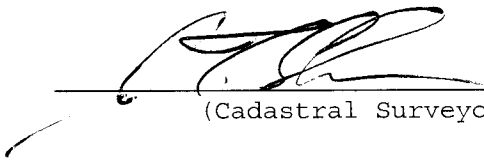
[illegible]

## CERTIFICATE OF SURVEY

I, Joel T. Ebner, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 26th day of February, 2001, I have dependently resurveyed portions of the south and west boundaries and portions of the subdivisional lines, Township 56 North, Range 73 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

DEC 31 2002

(Date)

  
(Cadastral Surveyor)

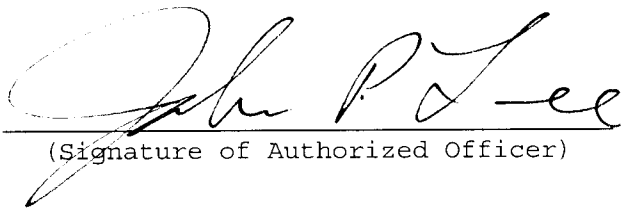
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of portions of the south and west boundaries and portions of the subdivisional lines, Township 56 North, Range 73 West, Sixth Principal Meridian, Wyoming, executed by Joel T. Ebner, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

DEC 31 2002

(Date)

  
(Signature of Authorized Officer)